


1 Have you got everything?

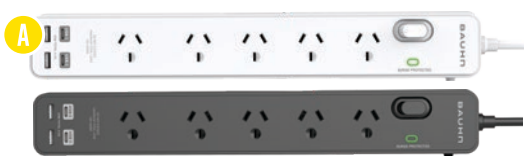


Unpack the box and make sure all of these items are there:

- A. 5-Way Surge Protection Power Board
- B. Front Mounting Bracket
- C. Rear Mounting Bracket
- D. User Guide
- E. Warranty Certificate

Note: only one power board (white/black) is supplied.

You will need a Philips head screwdriver (not included) to install or detach the desk clamp from the power board.



Product Overview

2

1 Surge Protected LED Indicator

When lit, the green light indicates that all connected devices are surge protected.

2 Power On/Off Switch

Press to supply/cut off power to the outlets.

3 Overload Circuit Breaker (Resettable)

Protects against current overload at 10 amps.

4 AC Sockets


All 5 sockets are the same protected sockets and can be used interchangeably.

5 Detachable Desk Clamp

For mounting the power board on a desk with a 15-50mm thickness.


6 USB-C and USB Charging Ports

For charging phones, tablets or other devices.

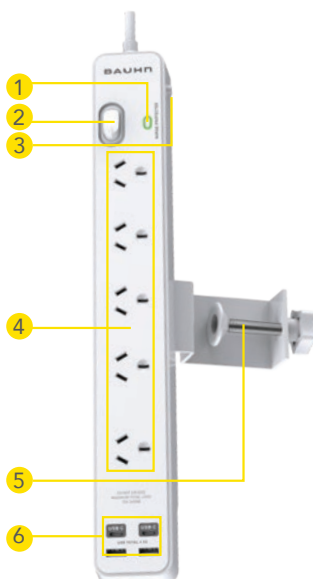


Using The Detachable Desk Clamp

1. Position the desk clamp (B) on the edge of a table at the desired location.
2. Twist the clamp lock (C) until the clamp stopper sits flush against the bottom of the table. Ensure the clamp is secure and not loose.
3. To detach the desk clamp from the power board, use a Philips head screwdriver (not included) to unscrew the 2 Philips head screws (D) on the back of the clamp to detach the clamp from the power board.
4. It includes 90° and 135° detachable clamps. Please select the appropriate clamp based on the type of desk you are using.



Front Desk Clamp



Rear Desk Clamp



Troubleshooting

No power output from one of the sockets

- Try other sockets. If the other sockets have power output, it's probably the contact of one faulty socket that is loose or not connected; avoid using that socket.

No power output from any of the sockets

- Check that the power switch is turned on (you can try to turn it on and off a few times to make sure it's switched on) and that the Active Power LED Indicator is lit green.
- Check the overload circuit breaker button to see whether it's tripping, push it down to reset the circuit breaker.
- Make sure the input socket for the power board has power output.

No output from the USB ports

- Check that the USB cable is connected securely to the USB port and/or try a different USB port.
- The total output current for the USB ports are 4.5A. Remove devices using the other USB ports.
- Use another USB cable.

Power board is not turning on

- Check that there is no visible damage to the plug or cord.
- Ensure that the devices connected do not exceed the total maximum load (2400W, 10A). If exceeded, unplug the devices and press the overload reset button.

Give us a call



What? You mean this User Guide didn't have ALL the answers? Speak to us! We'd love to help you get up and running as quickly as possible.

Call our **After Sales Support** on **1300 002 534**.

Operating hours: Monday-Friday, 8:30am-6pm; Saturday, 9am-6pm AEST

Enjoy using your power board!

Well done, you made it.
Now sit back and relax... Your powerboard is automatically covered by a 1-year warranty.
How nice!





Specifications

Input	230-240V 50Hz
Output	USB-C Output: 5V=3A Max USB-A Output: 5V=2.4A Max USB Output Total: 5V=4.5A Max
Total Loading	Max. 2400W
Surge Protection Maximum Energy	175J
Desk Clamp Thickness	Suitable for desks 15-50mm thickness
Power Cable	1.5m
Net Weight	1kg
Dimensions (L x W x H)	365 x 53 x 34 mm

General Safety Warnings

For the safety of yourself and others, follow all instructions and take notice of all the warnings. When adhered to, these safety precautions can reduce the risk of fire, electric shock and injury.

This product complies with Australian Safety standard AS/NZS 3105, AS/NZS 61558.2.16 to ensure the safety of the product.



The RCM is a visible indication of a product's compliance with all applicable ACMA regulatory arrangements, including all technical and record-keeping requirements.

IMPORTANT

- **Damage:** If the power board or cord is damaged, contact the After Sales Support line for advice. Do not attempt to open the board or replace the cord. The cord must be replaced by appropriately qualified personnel.
- **Repair:** If the power board requires repair, contact the After Sales Support line; never disassemble or modify the power board or attempt to service it yourself.
- Run the power supply cord in such a way that there will be no risk of anyone pulling it inadvertently or tripping over it.
- If power supply cord is damaged, it must be replaced by an authorised service agent or similarly qualified person to avoid a hazard.
- The power board is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction by a person responsible for their safety.
- Young children should be supervised to ensure they do not play with the power board. Close supervision is always necessary when any appliance is used by or near children.
- The product is not suitable for use in locations where children are likely to be present.
- The surge power board is designed for indoor use in dry places only.
- Do not exceed a maximum loading of 2400 watts.
- For safety reasons, always use earth connections.
- Only use the power board with the power supply cord fully unwound.
- Before installing the power board, make sure to place it away from: heat sources, radiators or other products that produce heat; areas with high temperatures, high humidity or direct sunlight; excess dirt and dust; open windows and any place where water may get to the unit.
- Do not immerse the cord, plug or the surge power board in water or other liquid, or expose the electrical connections to water or other liquid.

- Unpack the power board and keep the original packaging carton and materials in a safe place. It will help prevent any damage if the power board needs to be transported in the future, and you can use it to store the power board when it is not in use.
- The power board should always be repacked in its original packaging whenever transporting to prevent any possible damage to the product.
- **When not in use:** Disconnect from the power source and store in a cool, dry and well ventilated location out of direct sunlight, and not subject to humidity.
- **Warning:** The socket outlet should be located near the equipment and should be easily accessible.

Responsible disposal of the product

At the end of its working life, do not throw this product out with your household rubbish. An environmentally friendly method of disposal will ensure that valuable raw materials can be recycled. Contact your local authority for your nearest recycling centre. Electrical and electronic items contain materials and substances which, if handled or disposed of incorrectly, could potentially be hazardous to the environment and human health.

Responsible disposal of the packaging

The packaging of the product has been selected from environmentally friendly materials and can usually be recycled. Please ensure these are disposed of correctly. Plastic wrapping can be a suffocation hazard for babies and young children, please ensure all packaging materials are out of reach and are safely disposed of. Please ensure they are offered for recycling rather than throwing these materials away.

Cleaning the product

Only use a soft, dry cloth for cleaning the product; do not use a damp cloth. Never clean with industrial strength polish, wax, benzene, paint thinner, air freshener, lubricant, detergent or other chemicals. Wipe off any moisture, dirt or dust on the power sockets and plug pins with a clean, dry cloth.